



METAL KOMPANSATÖRLER



EKSENEL KOMPANSATÖR
Flanşlı

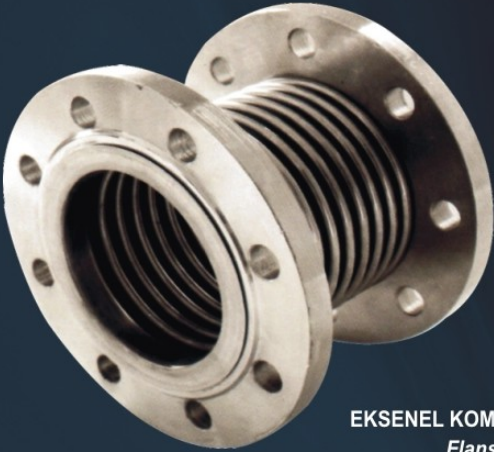

EKSENEL KOMPANSATÖR
Kaynak Boyunlu

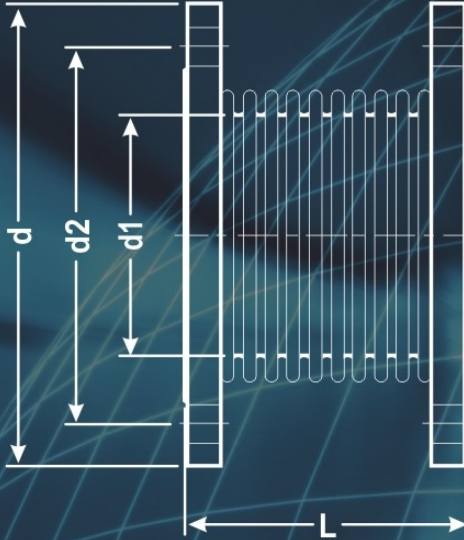

EKSENEL KOMPANSATÖR (Flanşlı)

NOMİNAL ÇAP		NOMİNAL BASINÇ	GENLEŞME (ΔL)		d	d1	d2
DN			30	60			
25	1"	16	110	-	115	43	85
32	1 1/4"	16	115	-	140	43	100
40	1 1/2"	16	115	-	150	48	110
50	2"	16	115	-	165	60	125
65	2 1/2"	16	115	190	185	77	145
80	3"	16	115	195	200	89	160
100	4"	16	115	200	220	114	180
125	5"	16	120	205	250	140	210
150	6"	16	130	210	285	168	240
200	8"	16	140	230	340	220	295
250	10"	16	150	235	405	273	355
300	12"	10	160	240	455	324	410
350	14"	10	165	250	500	355	460
400	16"	10	170	260	565	408	515
450	18"	10	180	270	610	458	565
500	20"	10	190	270	670	508	620
600	24"	6	180	260	750	310	705

TEKNİK ÖZELLİKLER

KÖRÜK MALZEMESİ= ANSI 304-316-321 PASLANMAZ ÇELİK


BAĞLANTI= Karbon Çelik / Paslanmaz Çelik

30 - 60 mm GENLEŞME

-180 °C + 650 °C'YE KADAR SICAKLIKTA KULLANIM

ÇALIŞMA BASINCI= max. 60 bar

BAĞLANTI ÇAPI= DN25 - DN 600

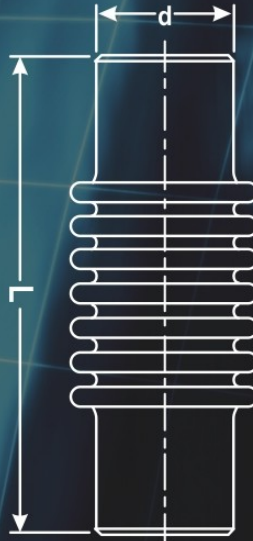

EKSENEL KOMPANSATÖR (Kaynak Boyunlu)

NOMİNAL ÇAP		NOMİNAL BASINÇ	GENLEŞME (ΔL)		d
DN			30	60	
25	1"	16	200	-	38
32	1 1/4"	16	200	-	42,4
40	1 1/2"	16	200	-	48,3
50	2"	16	200	-	60,3
65	2 1/2"	16	200	250	76,1
80	3"	16	200	250	88,9
100	4"	16	220	260	114,3
125	5"	16	230	270	139,7
150	6"	16	240	310	168
200	8"	16	260	340	219,1
250	10"	16	280	380	273
300	12"	10	300	380	323,9
350	14"	10	310	390	355
400	16"	10	320	400	406,4
450	18"	10	330	410	457
500	20"	10	340	420	508
600	24"	6	330	400	610,2